

SAFE
TOUGH
RELIABLE



IX1500

High Capacity, Indirect Fired Heater



SURE FLAME


1-800-661-1162

www.sureflame.ca

info@sureflame.ca

IX1500

1,500,000 BTU/HR

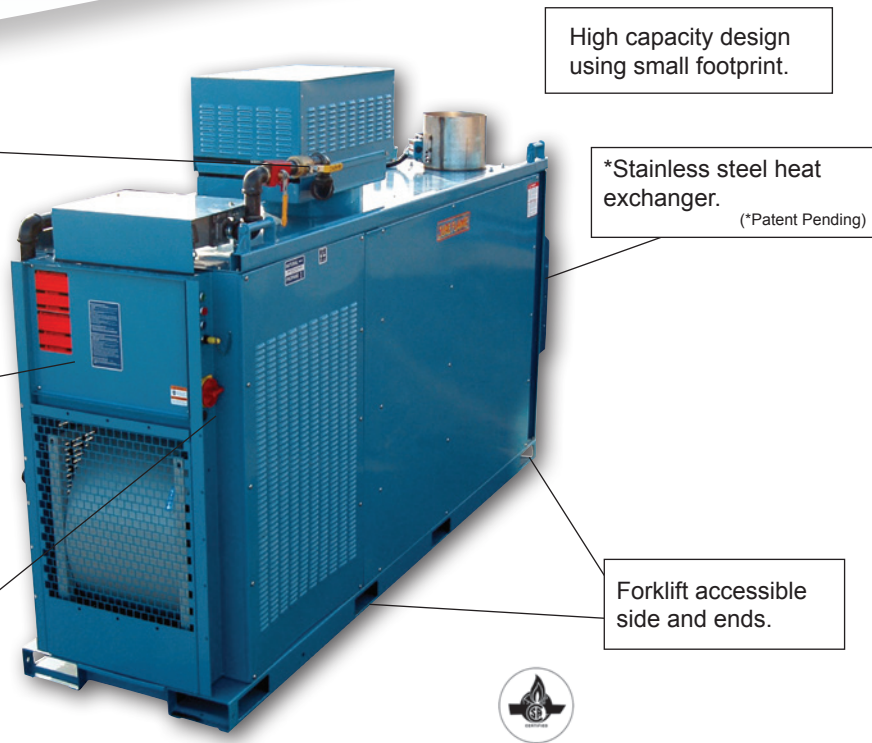

Quick Change fuel supply.
- Dual fuel selector valve for propane & natural gas

High capacity design using small footprint.

*Stainless steel heat exchanger.
(*Patent Pending)

3 safety shut down controls
- High limit switch
- Air switch
- Flame Rod

Multiple power configurations options.

Forklift accessible side and ends.

FEATURES



- **2- stage remote thermostat control.**
- High / Low / Off – reduced operating cost, higher fuel savings



- **Ductable inlet and outlet (24"x24") opening as std.**
- Other diameter outlets available as accessories
- **Compact Design.**
- Uses less space on the jobsite and during the off season

SPECIFICATIONS

IX 1500

HEAT INPUT	1,500,000 BTU/hr
HEATER EFFICIENCY	88 %
APPROX. FUEL CONSUMPTION	
Propane	62 l/hr 69.2 lbs/hr
Natural Gas	1500 CFH
FAN RATING	18,000* CFM
AIR FLOW	8,300* CFM
HEAT RISE	95 / 171 °C/°F
POWER	280/ 230/ 460/ 575 10HP / 3PH 40/ 36/ 18/ 14.4
THERMOSTAT RANGE	4 to 38 °C
OUTLET DIAMETER (Optional transitions available)	24" x 24"
MAX DUCT LENGTH	400'
FLUE CONNECTION	12"
DIMENSIONS (LxWxH)	124.5" x 32.5" x 77.5"
WEIGHT	2160
GAS CONNECTION	1 1/2" NPT
GAS SUPPLY PRESSURE (WC)	1/2 to 5 PSI

For more information Please contact us at 800.661.1162 info@sureflame.ca

*Actual output will depend on operating conditions.